


Aesthetically pleasing neutral appearance

Neutral 35 (RE35NEARL)

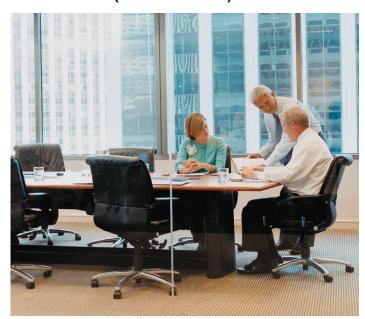

3M Neutral window films are also available with visible light transmissions of 50% and 70%.

Product Performance

Neutral 35				
Solar Heat Reduction	45%	35%	28%	22%
Heat Loss Reduction	0%	0%	0%	0%
Glare Reduction	58%	56%	58%	58%
UV Blocked	99%	99%	99%	99%
Total Solar Energy Rejected	56%	61%	50%	63%

- Reduces air conditioning costs
- Stay cooler by reducing excessive heat in warmer months
- · Reduces glare and eye discomfort
- Furniture and fabrics have a longer acceptable life
- Increased personal safety from flying glass

This product is also available in a 3M patented Ultra Safety & Security film.

The Skin Cancer Foundation recommends this 3M Window Film as an effective UV protectant.

Technical Data

Glass Type	Applied Product	Shading Coefficient	Visible Light		Emissisits	"II" Volue
			Reflected	Transmitted	Emissivity	"U" Value
	None	0.94	8%	88%	0.84	1.06
	RE35NEARL	0.51	20%	37%	0.84	1.06
	None	0.69	5%	50%	0.84	1.06
	RE35NEARL	0.45	9%	22%	0.84	1.06
	None	0.81	14%	78%	0.84	0.50
	RE35NEARL	0.58	24%	33%	0.84	0.50
	None	0.55	8%	45%	0.84	0.50
	RE35NEARL	0.43	10%	19%	0.84	0.50

3M Window Films are available with a comprehensive manufacturer-backed warranty when installed by 3M window film main dealers.

Building & Commercial Services 3M United Kingdom PLC

Customer Service Centre
Hudson Road
Bedford MK41 0HR
Tel: 01234 229496
Fax: 01234 229594
Email: commcare@mmm.com
www.3M.com/uk/facilities

3M Ireland

3M House, Adelphi Centre Dun Laoghaire Co. Dublin, Ireland Tel: 00 353 1 2803555 Fax: 00 353 1 2803509

3M